




# CITY OF LODI

PUBLIC WORKS DEPARTMENT

## Sidewalk and Driveway with Planting Strip

1/4" scoring lines match existing or standard City of Lodi spacing.

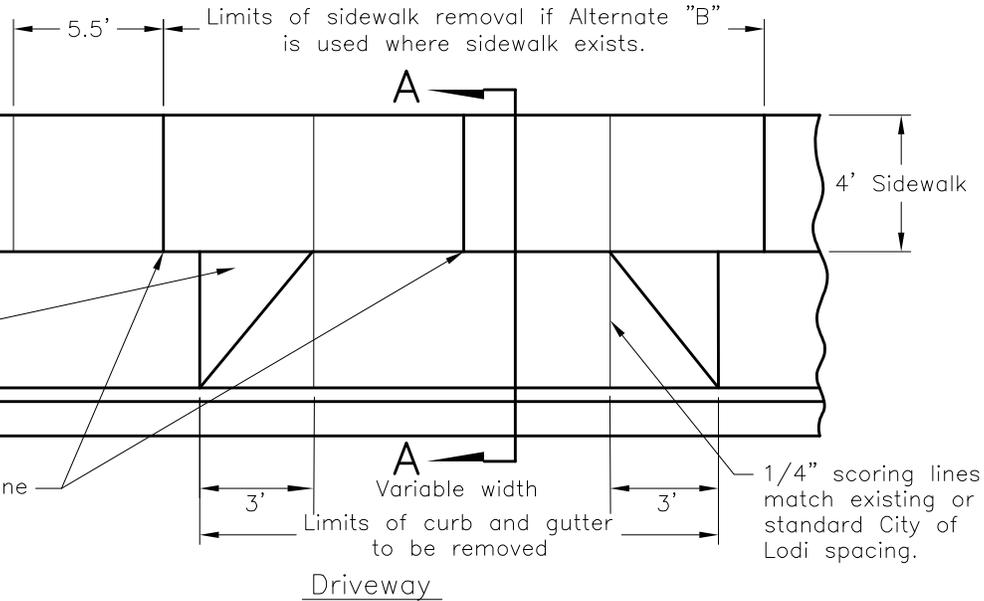


Fill both sides of driveway with concrete

Construct weakened plane joints at 11' intervals


Driveway

Curb and gutter to match existing or as specified on the plans.

8"-90% R.C. Concrete  
Subgrade Compaction  
(See note 3)

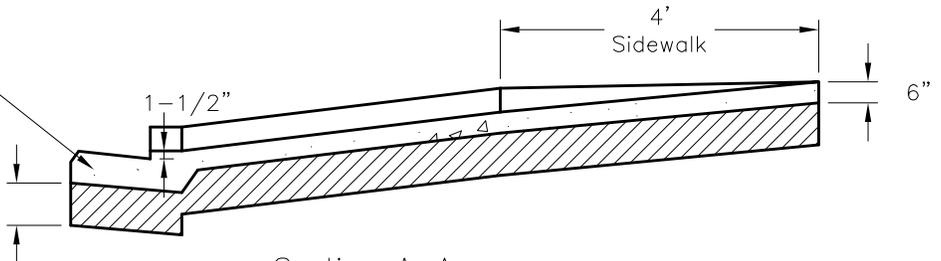


Section A-A  
Alternate A

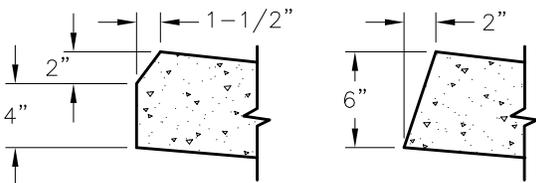

Detail

Alternate Toe Configurations

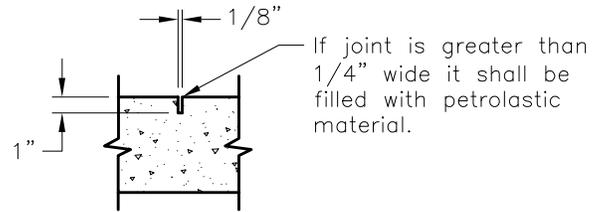


Detail

Weakened Plane Joint

Curb and gutter to match existing or as specified on the plans.

8"-90% R.C. Concrete  
Subgrade Compaction  
(See note 3)

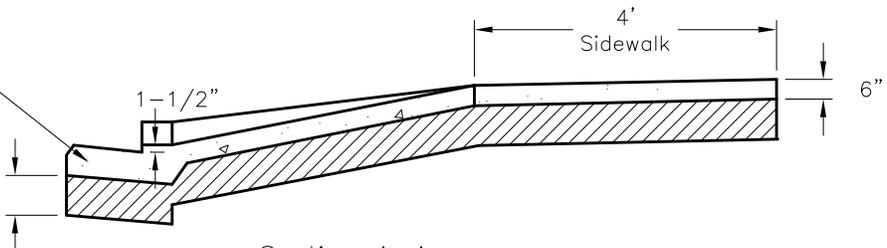

Section A-A  
Alternate B

Dr.	No.	Date	Revision	Appr.	Approved By:	STD PLAN
K	1	9/03	ADDED SCORE LINES		<i>F. Wally Sandelin</i> F. Wally Sandelin City Engineer R.C.E. 39895	121
Ch.	2	2/04	ADDED FILL AREA IN PARKWAY			
Date	3	2/05	ADDED ALT. B SECTION			
		12/00			2/2/05 Date	



# CITY OF LODI

PUBLIC WORKS DEPARTMENT

## Sidewalk and Driveway with Planting Strip

Notes:

1. Alternate "A" shall be used, except where the driveway slope approaches 3 inches per foot. It may then be necessary to use Alternate "B".
2. When Alternate "B" is used sidewalk shall be removed to nearest score-mark by sawing. When the sidewalk is replaced the existing scoring pattern shall be maintained.
3. Additional compaction is not required where existing curb and gutter, sidewalk, and/or driveway are being removed and replaced.
4. Class B concrete per Section 90 of Std. Specs, 1-1/2" max. aggregate with impervious membrane cure and light broom finish.

Dr.	No.	Date	Revision	Appr.	Approved By:	
K	1	9/03	ADDED SCORE LINES		<i>F. Wally Sandelin</i>	2/2/05
Ch. WS	2	2/04	ADDED FILL AREA IN PARKWAY			
Date	3	2/05	REVISED PAGE 1			
12/00					F. Wally Sandelin City Engineer R.C.E. 39895	Date

STD PLAN

121