

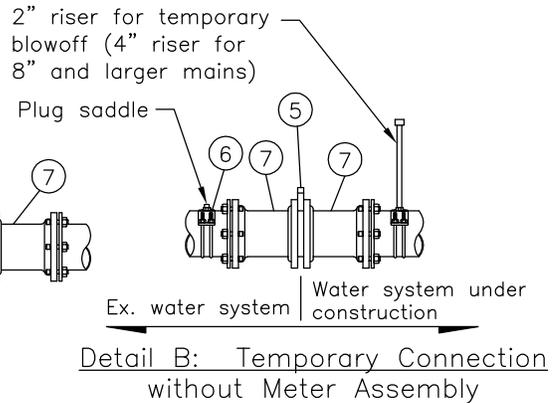
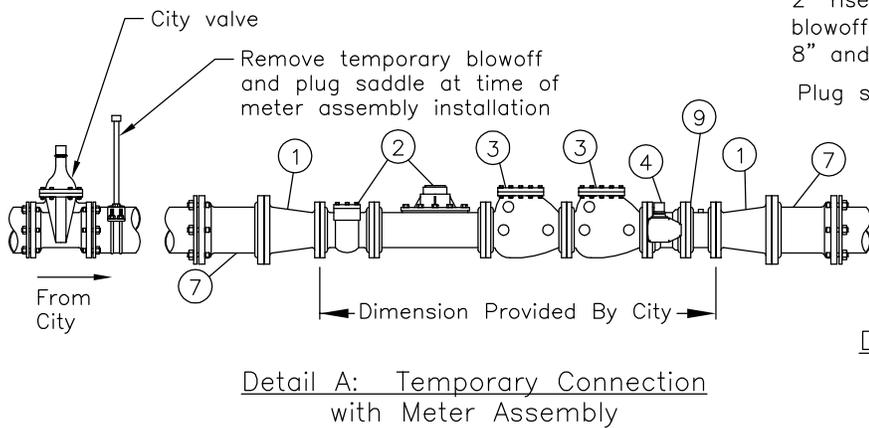


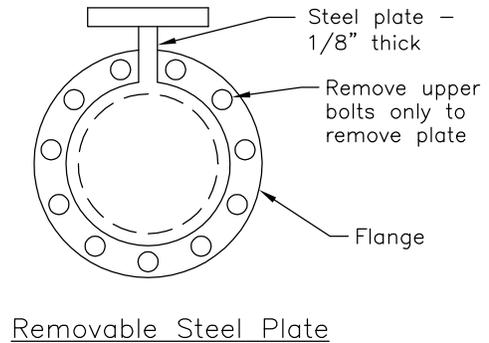

# CITY OF LODI

PUBLIC WORKS DEPARTMENT

## Temporary Water Blow-off and Connection Details

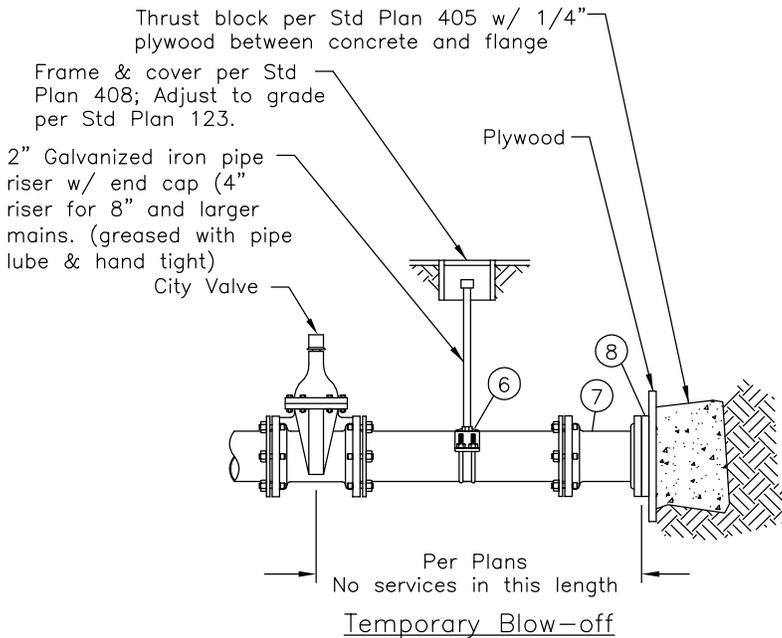

**Notes:**

1. The Contractor shall not operate any City valves. 24 hours notice is required for operation by City.
2. All connections to the existing system shall be made per Details A or B. Upon acceptance of the new system, the Contractor shall remove the riser, plug the saddles and remove the steel plate. Contractor shall also remove the meter assembly and install a flanged spool. Meter assembly shall be returned to the City.
3. Contractor shall supply and install reducers on meter assembly where main is larger than 6".
4. City shall furnish meter assembly upon receipt of deposit. Meter assembly to be installed by Contractor.

Dr. SN	No.	Date	Revision	Appr.	Approved By:
	1	9/03	REDRAWN		<i>F. Wally Sandelin</i> F. Wally Sandelin City Engineer R.C.E. 39895
Ch. WS	2	2/05	REVISED METER SPOOL ASSEMBLY DIMENSION		
Date		02/02			

2/2/05  
Date

STD PLAN

409



# CITY OF LODI

PUBLIC WORKS DEPARTMENT

## Temporary Water Blow-off and Connection Details Materials List

### Fittings Legend:

- ① Flanged Reducer (Furnished by the Contractor)
- ② Meter with Strainer
- ③ Check Valve
- ④ Butterfly Valve
- ⑤ Removable Steel Plate.
- ⑥ Double Strap Malleable Iron Saddle
- ⑦ Adapter MJ/FLG, Full face flange only.  
(Furnished by the Contractor)
- ⑧ Blind Flange
- ⑨ 6" Flg x Flg spool w/ 2" tapped fitting

Sheet 2 of 2

Dr.	No.	Date	Revision	Appr.	Approved By:	Date	STD PLAN
KT	1	9/03	REDRAWN		<i>F. Wally Sandelin</i>	2/2/05	409
WS	2	2/05	REVISED PAGE 1				
Date		12/00					

F. Wally Sandelin  
City Engineer  
R.C.E. 39895